



NEW K+CRE/GY WITH HIGH-EFFICIENCY IMPELLER



FIXING SYSTEM



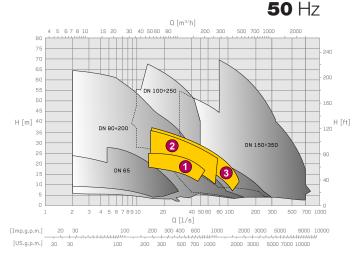

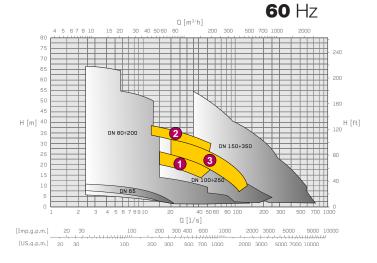

1 KCA100L

Q-H (b.e.p.)	38l/s @ 21m
Poles	4
Frequency	50-60 Hz
P ₂ max	12,5 kW
ATEX version	Yes

2 KCA100N

Q-H (b.e.p.)	65l/s @ 23m
Poles	4
Frequency	50-60 Hz
P ₂ max	26 kW
ATEX version	Yes

3 KCA150N

Q-H (b.e.p.)	85l/s @ 21m
Poles	4
Frequency	50-60 Hz
P ₂ max	26 kW
ATEX version	Yes



THE BEST PUMP IN THE WORLD OF WASTEWATER

1 HIGH EFFICIENCY IMPELLER

- Open twin blade construction: efficiency above 80%
- Maximum wear resistance: hardened cast iron

NEW 2 IMPELLER SETTING SYSTEM

- Fast impeller disc setting through external screw
- Easy maintenance

3 ANTI-CLOGGING SYSTEM

- Non stop: grooved impeller disc
- Maximum operational safety

International Patent

4 OIL COOLING SYSTEM

- Only one pump model for all applications
- S1 operation in dry chamber

5 IE3 ELECTRICAL EFFICENCY CLASS

- High motor efficiency
- Low energy costs

Now available for order



